
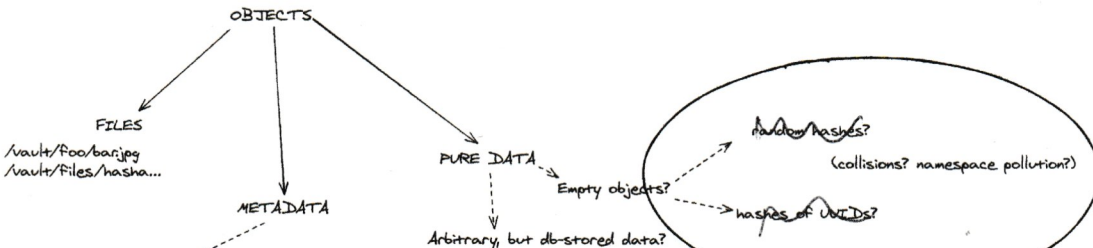
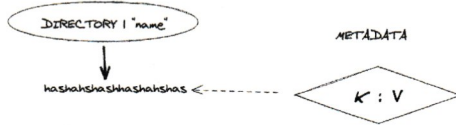


INDEPENDENT EXISTENCE?

(UUIDs vs. hashes...)

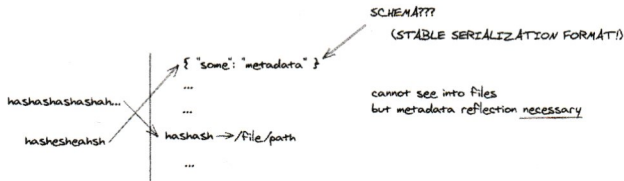

~~KEY VALUE~~  
~~ATTRS~~  
DATALOG!  
DATOMS!

TAGS  
RELATIONSHIPS  
DIRECTORIES

~~HOW ARE THEY REPRESENTED IN DATADOG?~~

necessity of  
flexible traversal

null pointers  
"blee-blahy objects/attrs"

Identity ~~UUIDS~~


hash / key / value

TAGS: bleh/bleh / tagged / ~~UUID~~

SCHEMAS

→ ~~UUID~~ / key name / "I am a key"

COLLISIONS!

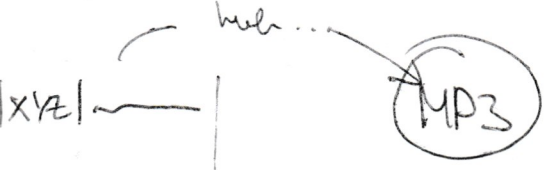

"key.name" vs. handle → ATTRS - key.name

key | is | (to be) UUID

↑ 1st-level

